



HITACHI

Hitachi, Ltd., Displays

Date : Sep. 06, 2002

TECHNICAL DATA

TX43D14VC0CAB

CONTENTS

No.	Item	Sheet No.	Page
-	COVER	3284STD - 0936 - 1	1-1/1
-	RECORD OF REVISION	3284STD - 0936 - 1	2-1/1
-	DESCRIPTION	3284STD - 0936 - 1	3-1/1
1	ABSOLUTE MAXIMUM RATINGS	3284STD - 0936 - 1	4-1/1
2	OPTICAL CHARACTERISTICS	3284STD - 0936 - 1	5-1/2 - 2/2
3	ELECTRICAL CHARACTERISTICS	3284STD - 0936 - 1	6-1/1
4	BLOCK DIAGRAM	3284STD - 0936 - 1	7-1/1
5	INTERFACE PIN CONNECTION	3284STD - 0936 - 1	8-1/6 - 6/6
6	INTERFACE TIMING	3284STD - 0936 - 1	9-1/3 - 3/3
7	DIMENSIONAL OUTLINE	3284STD - 0936 - 1	10-1/2 - 2/2
8	DESIGNATION OF LOT MARK	3284STD - 0936 - 1	11-1/1
9	COSMETIC SPECIFICATIONS	3284STD - 0936 - 1	12-1/3 - 3/3
10	PRECAUTION	3284STD - 0936 - 1	13-1/3 - 3/3

DESCRIPTION

The following specifications are applied to the following Super-TFT module.

Note : Inverter for back light unit is not built in this module.

Product Name : TX43D14VC0CAB

General Specifications

Effective Display Area	: (H)337.92×(V)270.336	(mm)
Number of Pixels	: (H)1,280×(V)1,024	(pixels)
Pixel Pitch	: (H)0.264×(V)0.264	(mm)
Color Pixel Arrangement	: R+G+B Vertical Stripe	
Display Mode	: Transmissive Mode Normally Black Mode	
Top Polarizer Type	: Anti-glare	
Number of Colors	: 16,777,216 colors (6bit+2bit FRC)	
Viewing Angle Range	: Super Wide Version	
Input Signal	: 2-channel LVDS (LVDS:Low Voltage Differential Signaling)	
Back Light	: 4 pcs. of CCFL	
External Dimensions	: (H)368.0×(V)306.0×(t)19.8	(mm)
Weight	: Max. 2,100 (g)	(Typ. 2,000 (g))

1. ABSOLUTE MAXIMUM RATINGS

1.1 Environmental Absolute Maximum Ratings

ITEM	Operating		Storage		Unit	Note
	Min.	Max.	Min.	Max.		
Temperature	0	55	-20	60	℃	1)
Humidity	2)		2)		%RH	1)
Vibration	-	4.9(0.5G)	-	14.7 (1.5G)	m/s 2	3)
Shock	-	29.4(3G)	-	490 (50G)	m/s 2	4)
Corrosive Gas	Not Acceptable		Not Acceptable		-	
Illumination at LCD Surface	-	50,000	-	50,000	lx	

Note 1) Temperature and Humidity should be applied to the glass surface of a Super-TFT module, not to the system installed with a module.

The temperature at the center of rear surface should be less than 60℃ on the condition of operating.

The brightness of a CCFL tends to drop at low temperature. Besides, the life-time becomes shorter at low temperature.

2) $T_a \leq 40^\circ\text{C}$ Relative humidity should be less than 85%RH max. Dew is prohibited.

$T_a > 40^\circ\text{C}$ Relative humidity should be lower than the moisture of the 85%RH at 40℃.

3) Frequency of the vibration is between 15Hz and 100Hz. (Remove the resonance point)

4) Pulse width of the shock is 10 ms.

1.2 Electrical Absolute Maximum Ratings

(1) Super-TFT Module

$V_{SS} = 0\text{ V}$

ITEM	SYMBOL	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	0	6.5	V	
Input Voltage for logic	V_I	-0.3	3.6	V	1)
Electrostatic Durability	V_{ESD0}	± 100		V	2),3)
	V_{ESD1}	± 8		kV	2),4)

Note 1) It is applied to pixel data signal and clock signal.

2) Discharge Coefficient : 200pF-250Ω, Environmental : 25℃-70%RH

3) It is applied to I/F connector pins.

4) It is applied to the surface of a metallic bezel and a LCD panel.

(2) Back-light

ITEM	SYMBOL	Min.	Max.	Unit	Note
Input Current	IL	-	7.0	mA _{rms}	1)
Input Voltage	VL	-	1800	V _{rms}	2)

Note 1) The specification shall be applied to each CFL. The specification is defined at ground line.

2) The specification shall be applied at connector pins for a CFL at start-up.

2. OPTICAL CHARACTERISTICS

The following optical characteristics are measured under stable conditions. It takes about 30 minutes to reach stable conditions. The measuring point is the center of display area unless otherwise noted.

The optical characteristics should be measured in a dark room or equivalent state.


Measuring equipment : Pritchard 1980A, or equivalent

Temperature of LCD surface = 25°C, VDD = 5.0V, f V = 60Hz,

IL = 6.5mA (average of 4 pieces of CFLs)

ITEM		SYMBOL	CONDITION	Min.	Typ.	Max.	UNIT	NOTE
Contrast Ratio		CR	$\theta = 0^\circ$ 1)	200	400	-	-	2)
Response Time	Rise	ton		-	20	30	ms	3)
	Fall	toff		-	20	30	ms	3)
Brightness of white		Bwh		185	230	-	cd/m ²	
Brightness uniformity		Buni		-	-	25	%	4)
Color Chromaticity (CIE)	Red	x		0.60	0.64	0.68	-	[Gray scale =255]
		y		0.31	0.35	0.39		
	Green	x		0.25	0.29	0.33		
		y		0.57	0.61	0.65		
	Blue	x		0.10	0.14	0.18		
		y		0.04	0.08	0.12		
	White	x		0.27	0.31	0.35		
		y		0.29	0.33	0.37		
Variation of Color Position (CIE)	Red	Δx	$\theta = +50^\circ$ $\phi = 0^\circ, 90^\circ$ $180^\circ, 270^\circ$ 1)	-	-	0.04	-	5) [Gray scale =255]
		Δy		-	-	0.04		
	Green	Δx		-	-	0.04		
		Δy		-	-	0.04		
	Blue	Δx		-	-	0.04		
		Δy		-	-	0.04		
	White	Δx		-	-	0.04		
		Δy		-	-	0.04		
Contrast Ratio at 85°		CR85°	$\theta = 85^\circ$ $\phi = 0^\circ, 90^\circ$ $180^\circ, 270^\circ$ 1)	10	-	-	-	


Note 1) Definition of Viewing Angle

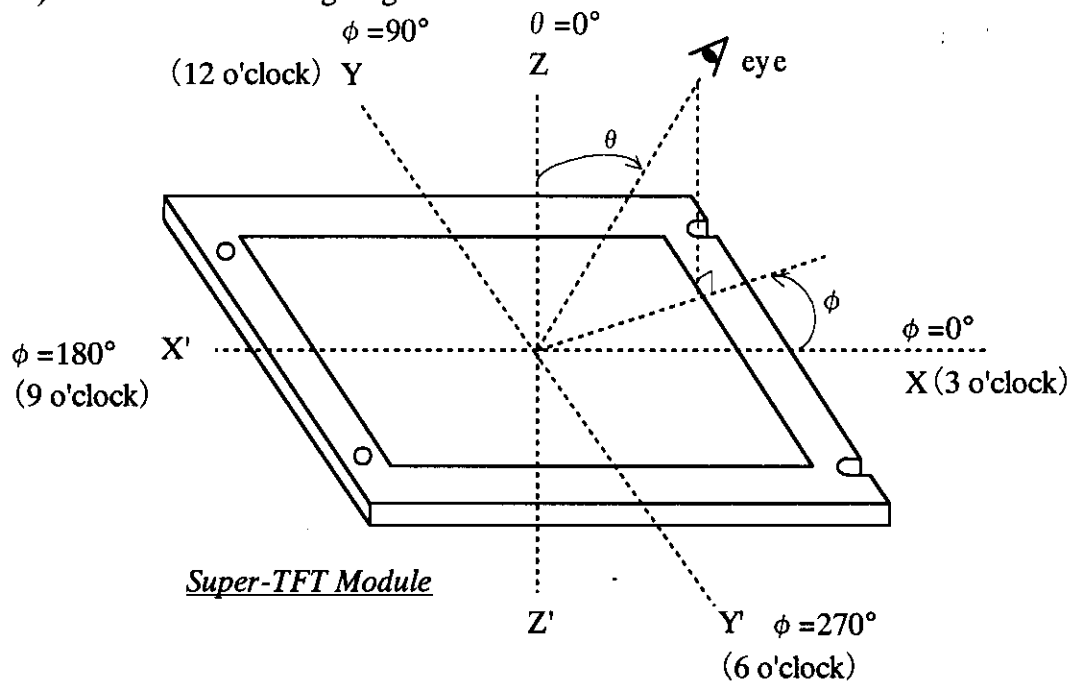


2) Definition of Contrast Ratio (CR)

$$CR = \frac{\text{(Luminance at displaying WHITE)}}{\text{(Luminance at displaying BLACK)}}$$

3) Definition of Response Time

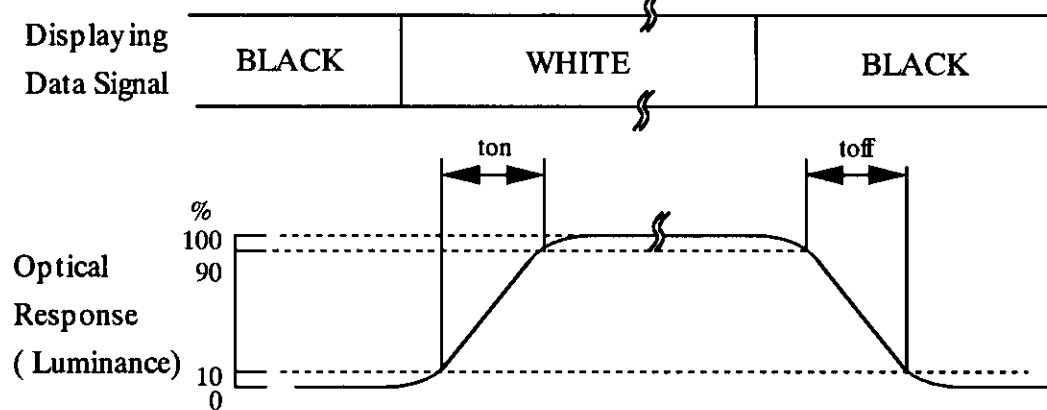

4) Definition of Brightness Uniformity

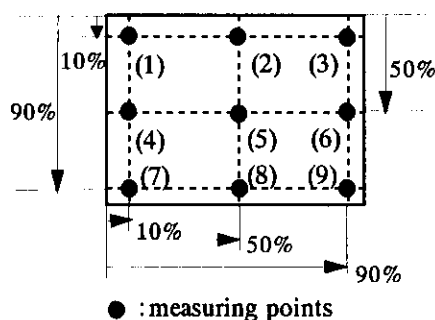

Display pattern is white (255 level) and gray scale. The brightness uniformity is defined as the following equation. Brightness at each point is measured, and average, maximum and minimum brightness is calculated.

$$B_{uni} = \frac{|B_{max \text{ or } B_{min}} - B_{ave}|}{B_{ave}} \times 100$$

where, B_{max} = Maximum brightness

B_{min} = Minimum brightness

$$B_{ave} = \text{Average brightness} = \frac{\sum_{k=1}^9 (B(k))}{9}$$

5) Variation of color position on CIE is defined as difference between colors at $\theta = 0^\circ$ and at $\theta = 50^\circ$ & $\phi = 0^\circ, 90^\circ, 180^\circ, 270^\circ$.

3. ELECTRICAL CHARACTERISTICS


3.1 TFT-LCD Module

$T_a=25^{\circ}\text{C}$, $V_{ss}=0\text{V}$

ITEM	SYMBOL	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	4.5	5	5.5	V	
Power Supply Current	I_{DD}	—	—	1.7	A	1),2),3)
Vsync Frequency	f_v	—	60	76	Hz	
Hsync Frequency	f_H	—	64	—	kHz	
DCLK Frequency	f_{CLK}	40	54	67.5	MHz	

Dimensions in parentheses are reference value.

Note 1) DC current at $f_v=60\text{Hz}$, $f_{CLK}=54\text{MHz}$ and $V_{DD}=5.0\text{V}$

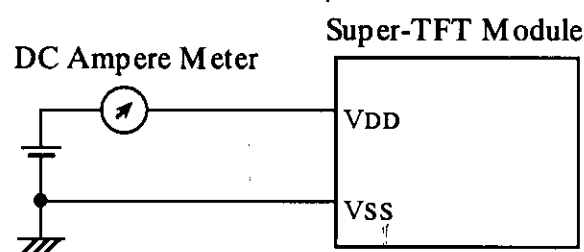

- 2) Current fuse(1.6A) is built in a module. Current capacity of power supply for VDD should be larger than 5A, so that the fuse can be opened at the trouble of power supply.
- 3) Characteristics of input signals are shown in LVDS data sheets. (Receiver:THC63LVDF84A)


3.2 Back Light

ITEM	SYMBOL	Min.	Typ.	Max.	Unit	Note
Input Current	I_L	-	6.5	7.0	mArms	1)
Input Voltage	V_L	-	700	-	Vrms	
Frequency	f_0	40	56	80	kHz	2)
Kick-Off Voltage	V_s	1500	-	1750	V	3)


- Notes
- 1) The specification shall be applied to each CFL. The specification is defined at ground line.
 - 2) Frequency of power supply for a CFL may cause the interference with HSYNC frequency and cause beat or flicker on the display. Therefore, lamp frequency shall be as different as possible from HSYNC frequency in order to avoid the interference.
 - 3) $T_a = 0$ degree

4. BLOCK DIAGRAM

(1) Super-TFT Module

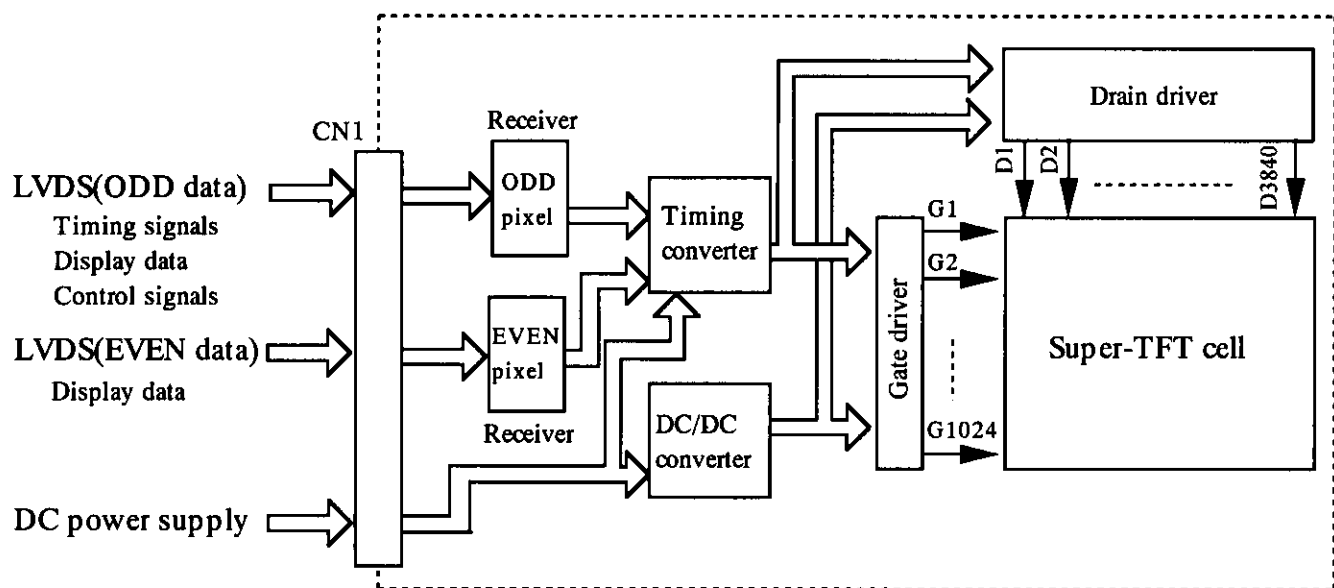

(2) Back light unit

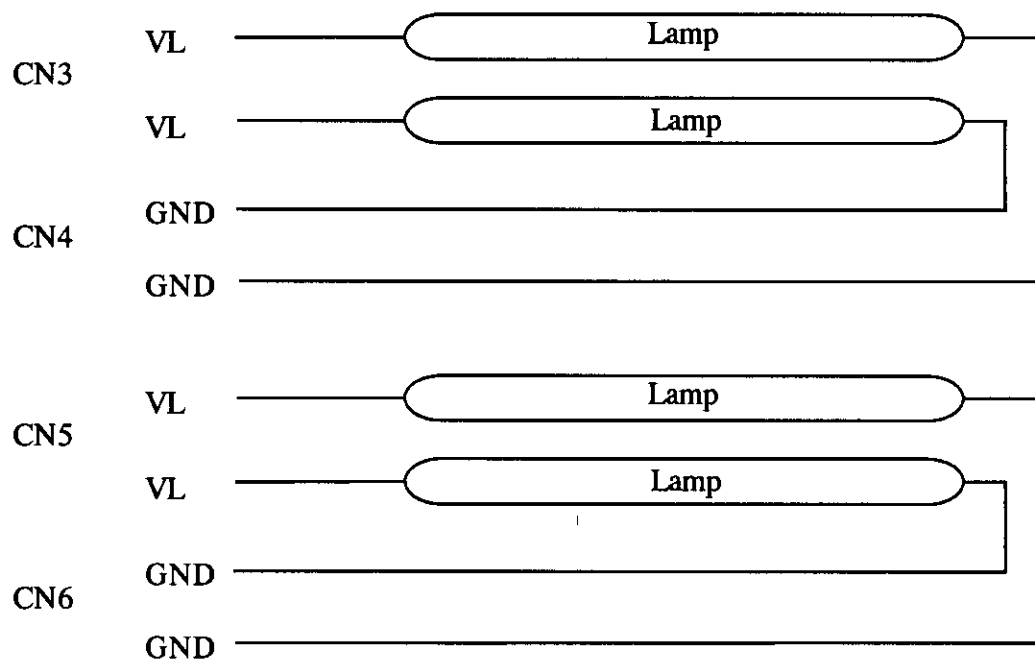

5. INTERFACE PIN ASSIGNMENT

5.1 TFT-LCD MODULE

CN1 : JAE FI-X30S-HF

(Matching connector : JAE FI-X30H or FI-X30M)

Pin No.	Symbol	Function
1	RAIN0-	ODD pixel data 2)
2	RAIN0+	
3	RAIN1-	ODD pixel data 2)
4	RAIN1+	
5	RAIN2-	ODD pixel data 2)
6	RAIN2+	
7	Vss	GND (0V) 1)
8	RACLKIN-	ODD pixel clock 2)
9	RACLKIN+	
10	RAIN3-	ODD pixel data 2)
11	RAIN3+	
12	RBIN0-	EVEN pixel data 2)
13	RBIN0+	
14	Vss	GND (0V) 1)
15	RBIN1-	EVEN pixel data 2)
16	RBIN1+	
17	Vss	GND (0V) 1)
18	RBIN2-	EVEN pixel data 2)
19	RBIN2+	
20	RBCLKIN-	EVEN pixel clock 2)
21	RBCLKIN+	
22	RBIN3-	EVEN pixel data 2)
23	RBIN3+	
24	Vss	GND (0V) 1)
25	NC	No connection 3)
26	DE	No connection 3)
27	NC	No connection 3)
28	VDD	Power supply (+5V) 4)
29	VDD	
30	VDD	


Notes 1) All Vss pins should be grounded.

2) RnINm+ and RnINm- (n=A,B m=0,1,2,3) should be wired by twist-pairs or side-by-side FPC patterns, respectively.

3) Please keep open.

4) All VDD pins should be connected to +5.0 V(typ.).

5) Pin assignment is as follows.

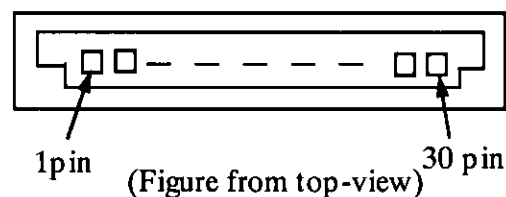

5. 2 BACK-LIGHT UNIT


CN3,CN5 : JST BHSR-02VS-1

Pin No.	SYMBOL	Function
1	VL	Power Supply
2	VL	Power Supply

CN4,CN6 : JST BHR-02VS-1

Pin No.	SYMBOL	Function
1	GND	GND
2	GND	GND

BLOCK DIAGRAM OF INTERFACE

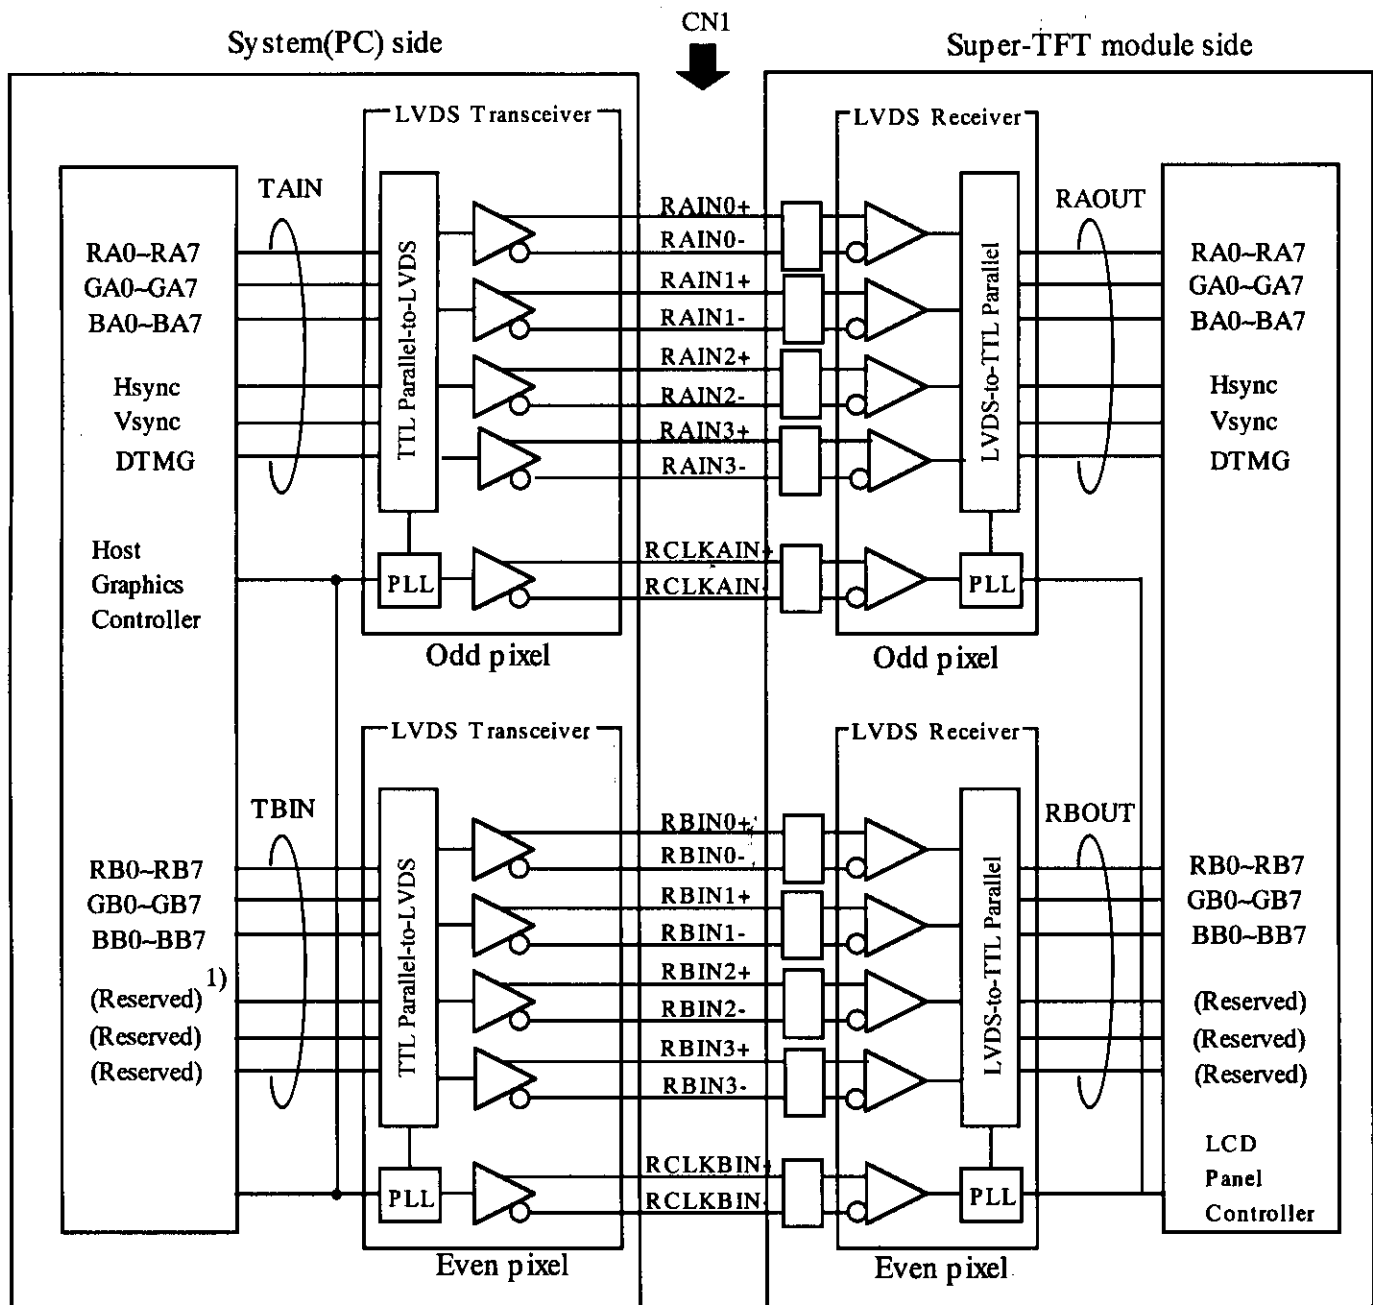

Receiver : Equivalent of THC63LVDF84A by Thine

RA0~7, RB0~7 : R data
 GA0~7, GB0~7 : G data
 BA0~7, BB0~7 : B data
 Hsync : Horizontal synchronization
 Vsync : Vertical synchronization
 DTMG : Display timing data

Notes 1) RSVD(reserved) pins on a transmitter should be connected with Vss.

2) The system must have a LVDS transmitter to drive a module.

3) The impedance of LVDS cable should be 50 ohms per a signal line or about 100 ohms per a twist-pair line when it is used differentially.

LVDS INTERFACE

	INPUT SIGNAL	Transmitter		Interface connector		Receiver THC63LVDF84A		TFT
		pin	INPUT	System side	Super-TFT modu	pin	OUTPUT	control input
LVDS Odd	RA0	51	TAIN0	TA OUT0+	RA IN0+	27	RAOUT0	RA0
	RA1	52	TAIN1			29	RAOUT1	RA1
	RA2	54	TAIN2			30	RAOUT2	RA2
	RA3	55	TAIN3			32	RAOUT3	RA3
	RA4	56	TAIN4	TA OUT0-	RA IN0-	33	RAOUT4	RA4
	RA5	3	TAIN6			35	RAOUT6	RA5
	GA0	4	TAIN7			37	RAOUT7	GA0
	GA1	6	TAIN8			38	RAOUT8	GA1
	GA2	7	TAIN9	TA OUT1+	RA IN1+	39	RAOUT9	GA2
	GA3	11	TAIN12			43	RAOUT12	GA3
	GA4	12	TAIN13			45	RAOUT13	GA4
	GA5	14	TAIN14			46	RAOUT14	GA5
	BA0	15	TAIN15	TA OUT1-	RA IN1-	47	RAOUT15	BA0
	BA1	19	TAIN18			51	RAOUT18	BA1
	BA2	20	TAIN19			53	RAOUT19	BA2
	BA3	22	TAIN20			54	RAOUT20	BA3
	BA4	23	TAIN21	TA OUT2+	RA IN2+	55	RAOUT21	BA4
	BA5	24	TAIN22			1	RAOUT22	BA5
	HSYNC	27	TAIN24			3	RAOUT24	HSYNC
	VSNC	28	TAIN25			5	RAOUT25	VSNC
	DTMG	30	TAIN26	TA OUT2-	RA IN2-	6	RAOUT26	DTMG
	RA6	50	TAIN27			7	RAOUT27	RA6
	RA7	2	TAIN5			34	RAOUT5	RA7
	GA6	8	TAIN10			41	RAOUT10	GA6
	GA7	10	TAIN11	TA OUT3+	RA IN3+	42	RAOUT11	GA7
	BA6	16	TAIN16			49	RAOUT16	BA6
	BA7	18	TAIN17			50	RAOUT17	BA7
	RSVD 1)	25	TAIN23			2	RAOUT23	RSVD
	DCLK	31	TCLKA IN	TCLKA OUT+	RCLKA IN+	26	RCLKA OUT	DCLK
				TCLKA OUT-	RCLKA IN-			
LVDS Even	RB0	51	TBIN0	TB OUT0+	RB IN0+	27	RBOUT0	RB0
	RB1	52	TBIN1			29	RBOUT1	RB1
	RB2	54	TBIN2			30	RBOUT2	RB2
	RB3	55	TBIN3			32	RBOUT3	RB3
	RB4	56	TBIN4	TB OUT0-	RB IN0-	33	RBOUT4	RB4
	RB5	3	TBIN6			35	RBOUT6	RB5
	GB0	4	TBIN7			37	RBOUT7	GB0
	GB1	6	TBIN8			38	RBOUT8	GB1
	GB2	7	TBIN9	TB OUT1+	RB IN1+	39	RBOUT9	GB2
	GB3	11	TBIN12			43	RBOUT12	GB3
	GB4	12	TBIN13			45	RBOUT13	GB4
	GB5	14	TBIN14			46	RBOUT14	GB5
	BB0	15	TBIN15	TB OUT1-	RB IN1-	47	RBOUT15	BB0
	BB1	19	TBIN18			51	RBOUT18	BB1
	BB2	20	TBIN19			53	RBOUT19	BB2
	BB3	22	TBIN20			54	RBOUT20	BB3
	BB4	23	TBIN21	TB OUT2+	RB IN2+	55	RBOUT21	BB4
	BB5	24	TBIN22			1	RBOUT22	BB5
	RSVD 1)	27	TBIN24			3	RBOUT24	RSVD
	RSVD 1)	28	TBIN25			5	RBOUT25	RSVD
	RSVD 1)	30	TBIN26	TB OUT2-	RB IN2-	6	RBOUT26	RSVD
	RB6	50	TBIN27			7	RBOUT27	RB6
	RB7	2	TBIN5			34	RBOUT5	RB7
	GB6	8	TBIN10			41	RBOUT10	GB6
	GB7	10	TBIN11	TB OUT3+	RB IN3+	42	RBOUT11	GB7
	BB6	16	TBIN16			49	RBOUT16	BB6
	BB7	18	TBIN17			50	RBOUT17	BB7
	RSVD 1)	25	TBIN23			2	RBOUT23	RSVD
	DCLK	31	TCLKB IN	TCLKB OUT+	RCLKB IN+	26	RCLKB OUT	DCLK
				TCLKB OUT-	RCLKB IN-			

CORRESPONDENCE BETWEEN INPUT DATA AND DISPLAY IMAGE

(1, 1)			(1, 2)		
RA	GA	BA	RB	GB	BB

Odd pixel : RA0~RA7 : R data

GA0~GA7 : G data


BA0~BA7 : B data

Even pixel : RB0~RB7 : R data

GA0~GA7 : G data

BB0~BB7 : B data

1,1	1,2	1,3	-----	1,1280
2,1	2,2	2,3	-----	2,1280
3,1	3,2	3,3	-----	3,1280
⋮	⋮	⋮		⋮
1024,1	1024,2	1024,3	-----	1024,1280

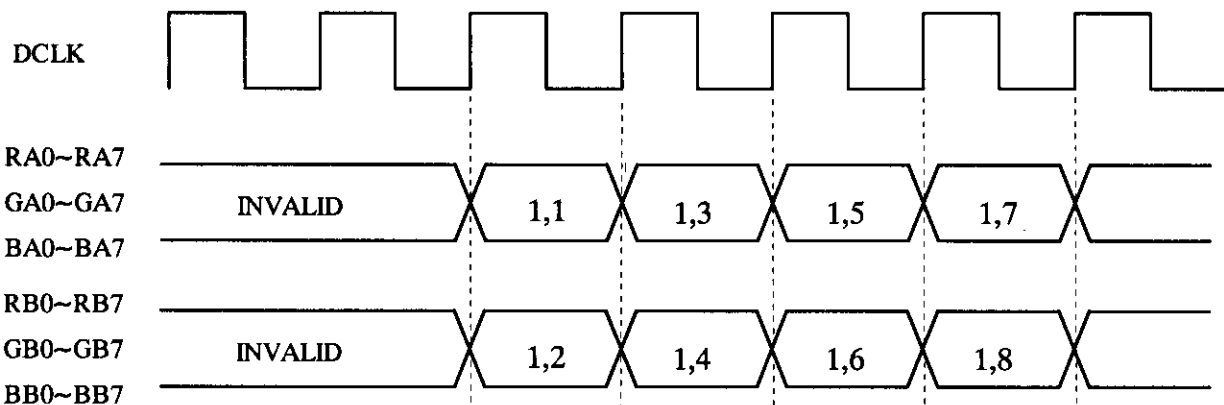

RELATIONSHIP BETWEEN DISPLAY COLORS AND INPUT SIGNALS

Input data Color		R data								G data								B data							
		RA7	RA6	RA5	RA4	RA3	RA2	RA1	RA0	GA7	GA6	GA5	GA4	GA3	GA2	GA1	GA0	BA7	BA6	BA5	BA4	BA3	BA2	BA1	BA0
		RB7	RB6	RB5	RB4	RB3	RB2	RB1	RB0	GB7	GB6	GB5	GB4	GB3	GB2	GB1	GB0	BB7	BB6	BB5	BB4	BB3	BB2	BB1	BB0
		MSB								LSB								MSB							
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(2)	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	GREEN(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	GREEN(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	BLUE(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	BLUE(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1


Notes 1) Definition of gray scale : Color (n)

n indicates gray scale level. Higher n means brighter level.

2) Data signals : 1:High, 0:Low

6. TIMING DIAGRAMS OF INTERFACE TIMING

6.1 Timing diagrams of interface signal (DTMG mode)

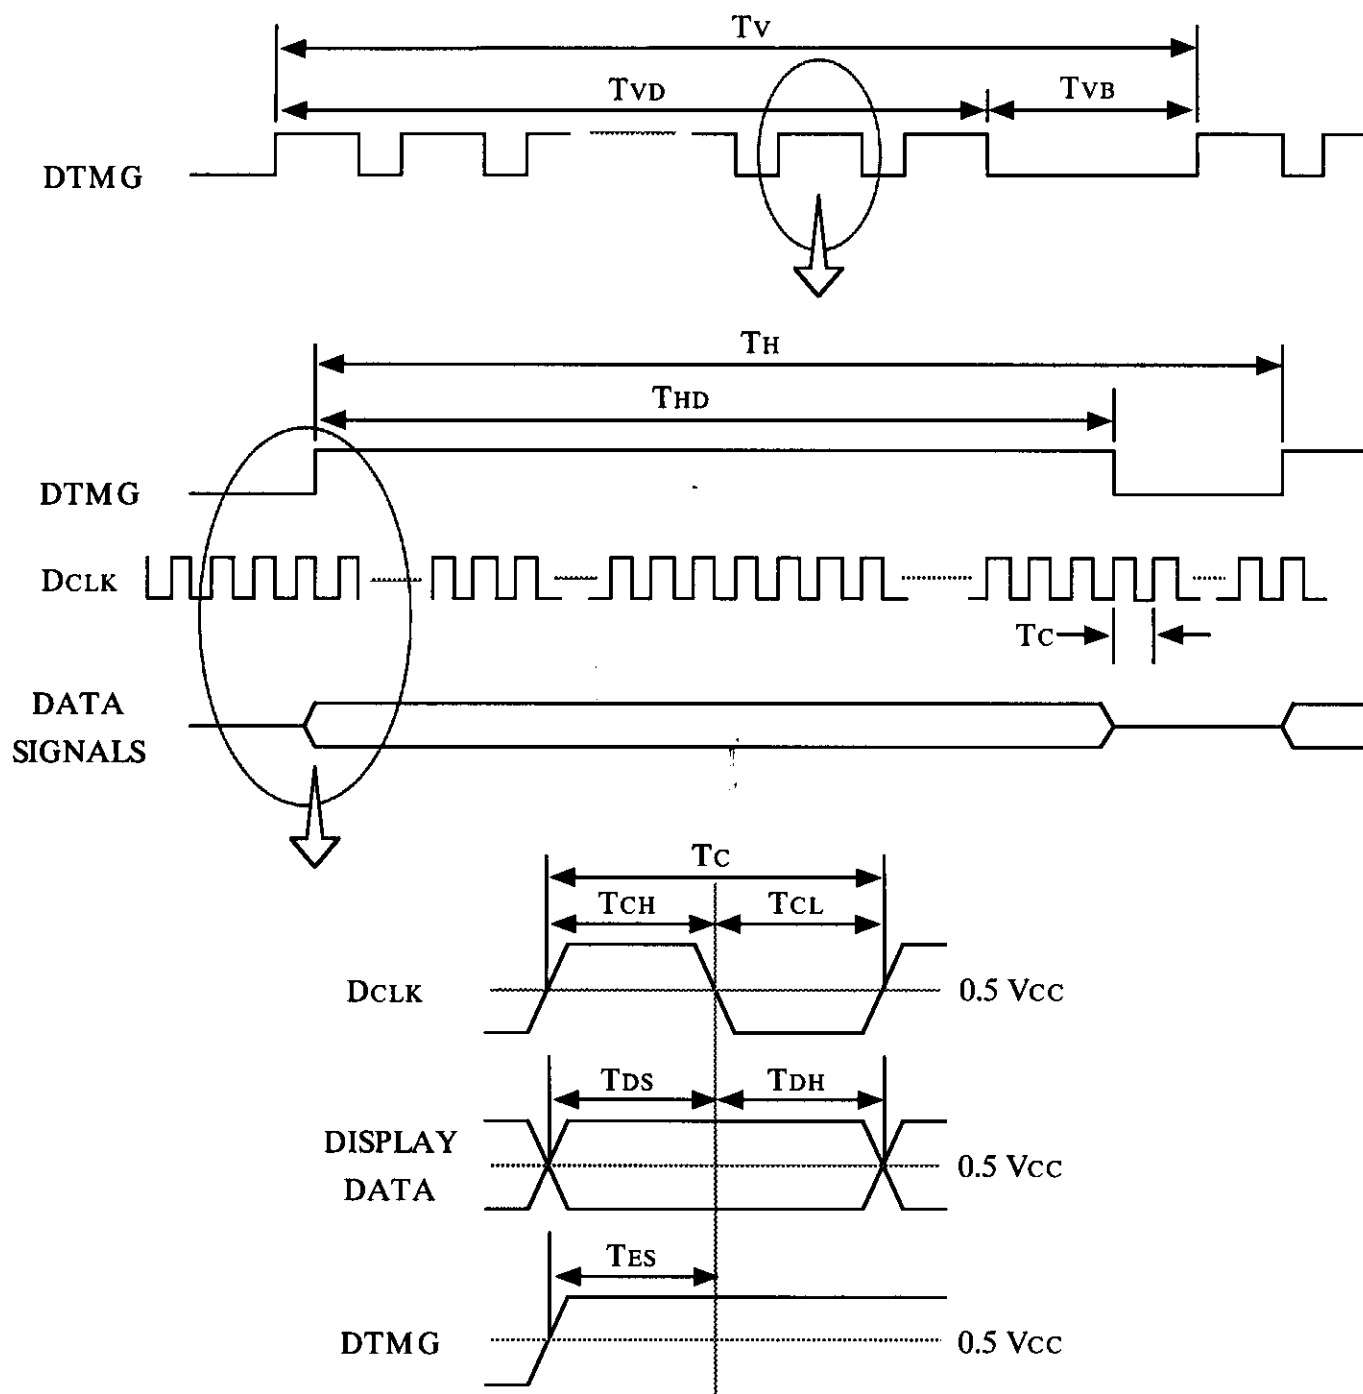


6.2 Timing Parameters (DTMG mode)

2pxl/clock

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
Clock	Frequency	1/Tc	40	-	67.5	MHz	
	High Time	TCH	4	-	-	nsec	
	Low Time	TCL	4	-	-	nsec	
Data	Setup Time	TDS	4	-	-	nsec	
	Hold Time	TDH	4	-	-	nsec	
Data Enable	Setup Time	TES	4	-	-	nsec	
Frame Frequency	Cycle	Tv	13.15	16.7	20	msec	
			1027	1066	2000	lines	
Vertical Active Display Term	Display Period	TvD	1024	1024	1024	lines	
	Vertical Blank Period	TvB	3	-	-	lines	
One Line Scanning Time	Cycle	TH	685	-	1200	clocks	
Horizontal Active Display Term	Display Period	THD	640	640	640	clocks	

6.3 TIMING BETWEEN INTERFACE SIGNALS AND POWER SUPPLY

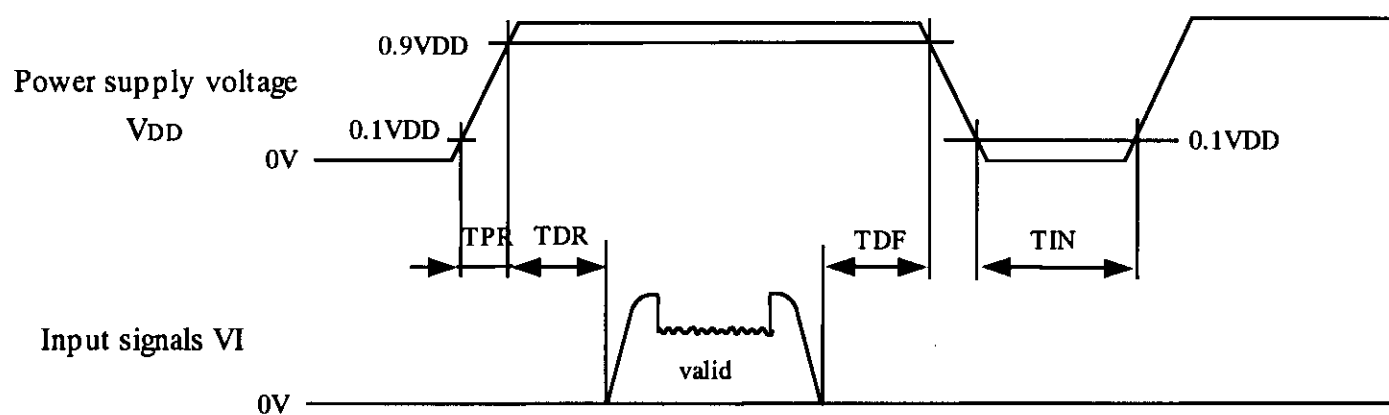

Timing of power supply voltage and input signals should be used under the following specifications.


$$0\text{ms} \leq \text{TPR} \leq 10\text{ms}$$

$$0\text{ms} \leq \text{TDR} \leq 50\text{ms}$$

$$0\text{ms} \leq \text{TDF} \leq 50\text{ms}$$


$$\text{TIN} \geq 500\text{ms}$$

$$\text{TIV} \leq 3\text{ms}$$

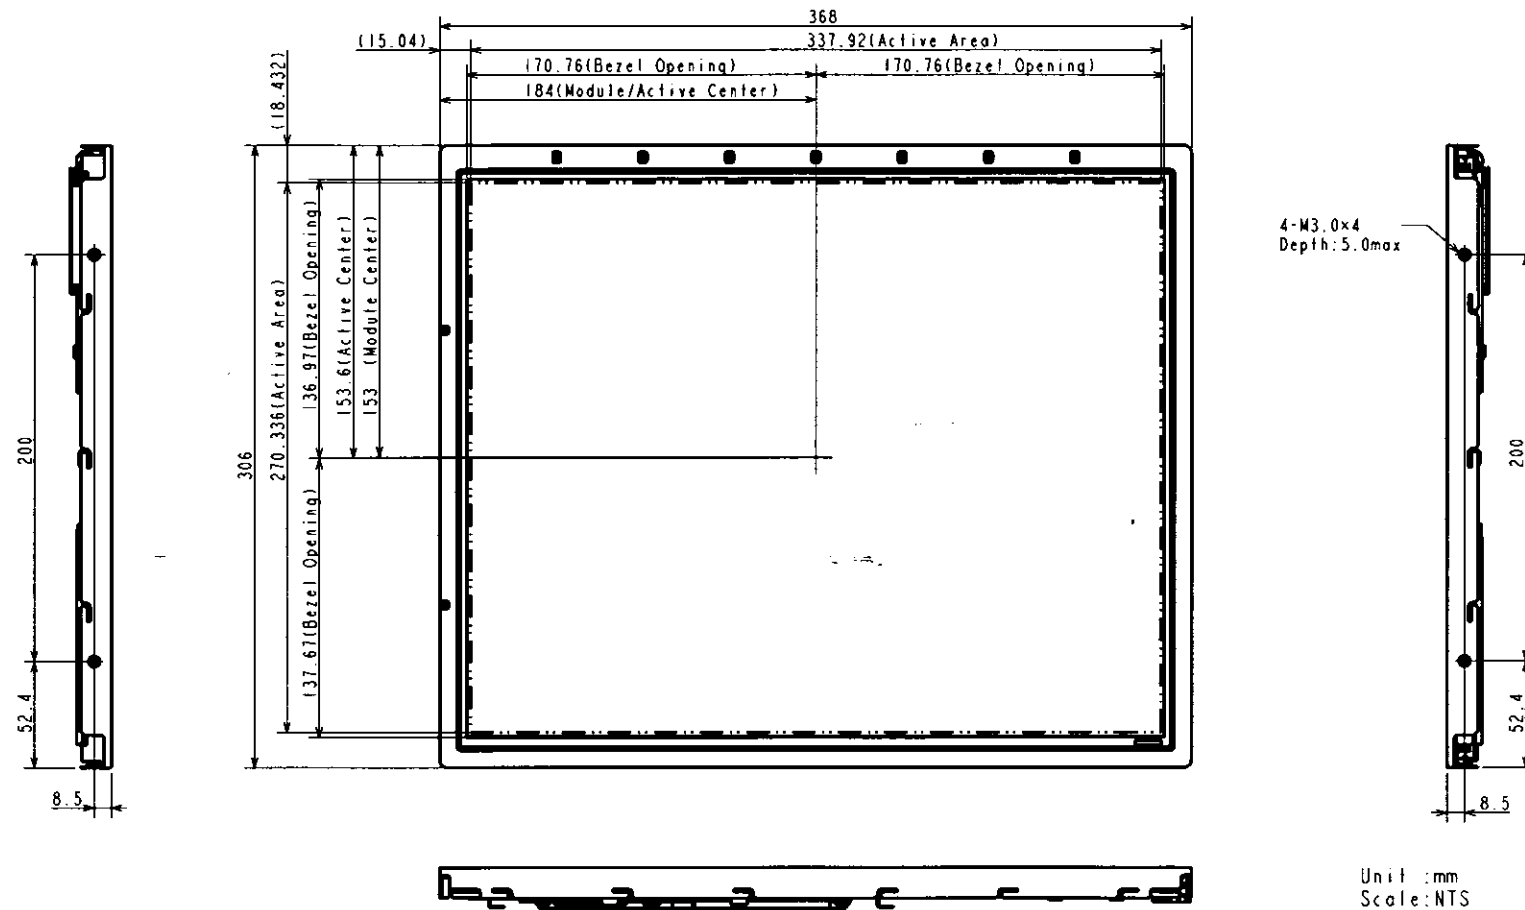

- Note 1) Dimension in parentheses are reference value.
 2) Tolerance not specified is $\pm 0.5\text{mm}$
 3) Maximum torque for the screw in mounting module: 0.392N·m.

Hitachi, Ltd.	Date	Sep.06,2002	Sh. No.	3284STD - 0936 - 1	Page	10-1/2
---------------	------	-------------	---------	--------------------	------	--------

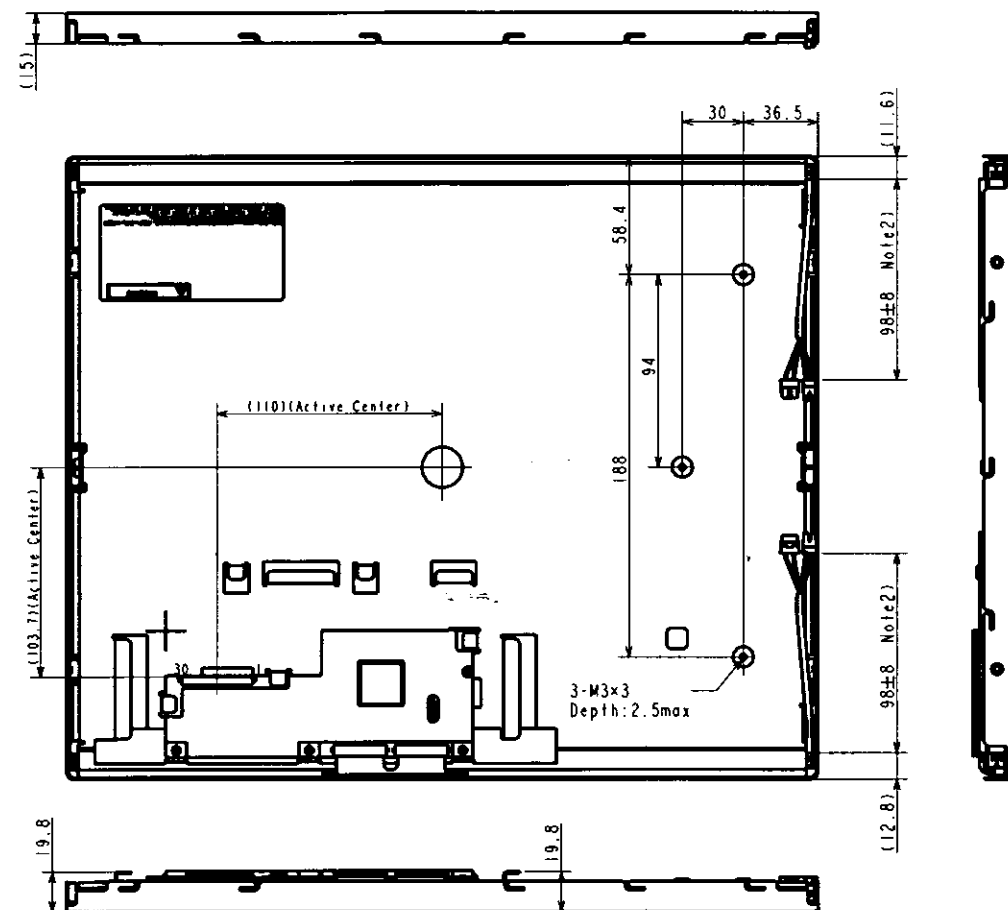


Unit :mm
Scale:mm

- Note 1)Maximum torque for the screw in mounting inverter:0.392N·m.
2)Air space over 2.0mm should be ensured in the location between our module(Near the lamp cable portion) and the holding bord of your product.

Hitachi, Ltd.	Date	Sep.06,2002	Sh. No.	3284STD - 0936 - 1	Page	10-2/2
---------------	------	-------------	---------	--------------------	------	--------

8. DESIGNATION OF LOT MARK

8.1 LOT MARK

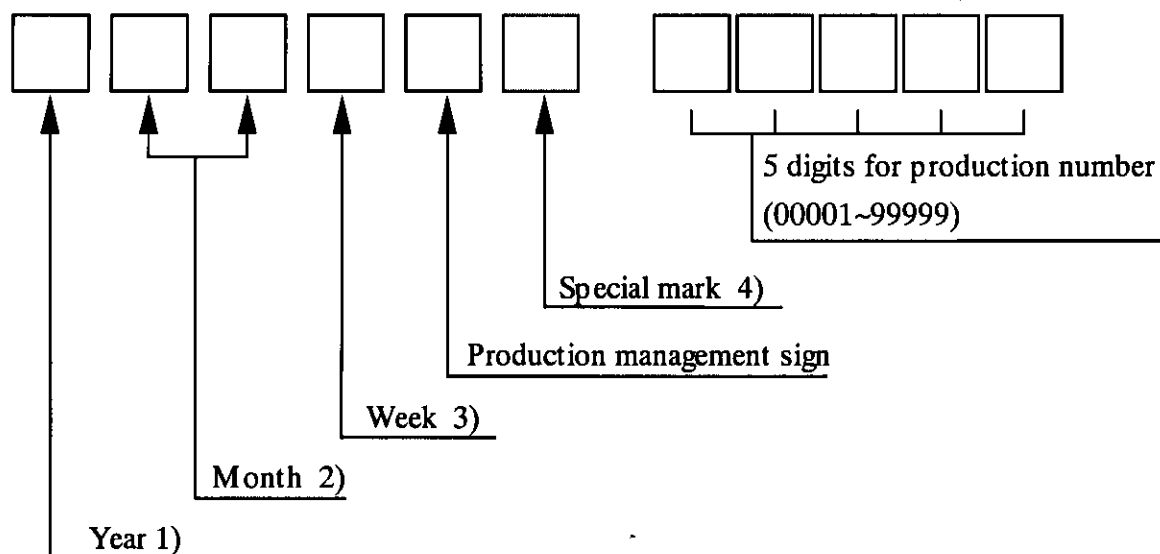

Notes 1)

Year	Mark
2002	2
2003	3
2004	4
2005	5

2)

Month	Mark	Month	Mark
1	01	7	07
2	02	8	08
3	03	9	09
4	04	10	10
5	05	11	11
6	06	12	12

3)

Week (Days)	Mark
1~7	1
8~14	2
15~21	3
22~28	4
29~31	5

4) It is the mark that was opened up by production person to take correspondence with production number.

8.2 Revision (REV.) control

REV. is the column for manufacturing convenience. A-Z except I and O may be written on this column.

8.3 Location of lot mark

Lot mark is printed on a label. The label is on the metallic bezel as shown in 7. External Dimensional. The style of character will be changed without notice.

8.4 Contents of Bar Coad (Code spec. : CODE39)

「Parts name(13digit) + Lot(6digit) + Optional Code(1digit) + Serial#(5digit) + Revision(2digit)」

Note : Blank column(Optional Code & Bottom digit of Revision)

Diagram of a Hitachi label with the following fields:

- Lot mark:** TX43D14VC0CAB
- REV.:** 2012H 00007
- Patent# (SuperIPS):** USP 5576867 JP 2743293 USP 5598285
- Bar Cord:** * TX43D14VC0CAB 02012H 00007 [] *

Additional text on the label:


- HITACHI
- MADE IN JAPAN
- CAUTION HIGH VOLTAGE
- 80 01 90 1 K N Y004939
- 本ディスプレイユニット内の蛍光管には水銀が含まれております。液晶ディスプレイの廃棄に当たっては地方自治体の条例または規則に従って廃棄して下さい。
- COLD CATHODE FLUORESCENT LAMP IN COLOR LCD CONTAINS MERCURY.
- PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR ITS DISPOSAL.

9. COSMETIC SPECIFICATIONS

9.1 Condition for cosmetic inspection

(1) Viewing zone


- a) The figure shows the correspondence between eyes (of inspector) and TFT-LCD module.
 $\theta < 45^\circ$: when non-operating inspection
 $\theta < 5^\circ$: when operating inspection
- b) Inspection should be executed only from front side and only A-zone.
 Cosmetic of B-zone and C-zone are ignore.
 (refer to 9.2 Definition of zone)

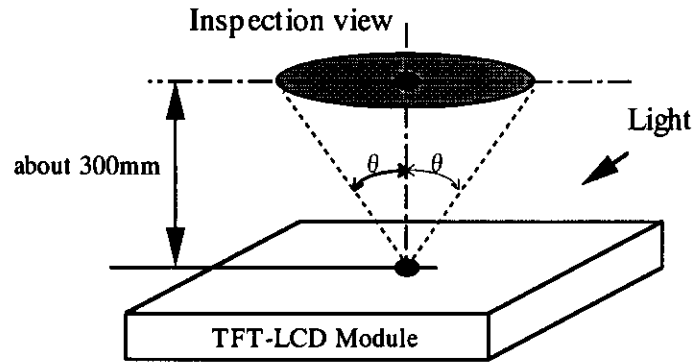

(2) Environmental

- a) Temperature : 25 degrees
- b) Ambient light : about 700 lx and non-directive when operating inspection.
 : about 1000 lx and non-directive when non-operating inspection.
- c) Back-light : when non-operating inspection, back-light should be off.

9.2 Definition of zone

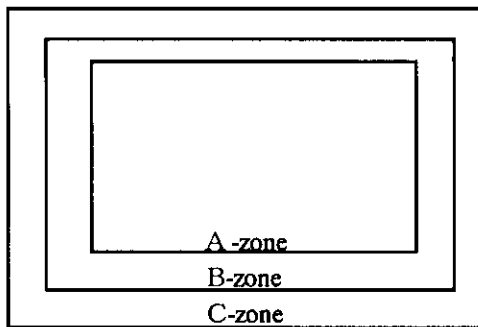

- A-zone : Display area (pixel area)
- B-zone : Area between A-zone and C-zone
- C-zone : Metallic bezel area (include I/F connector)

9.3 COSMETIC SPECIFICATIONS

When displaying conditions are not stable (ex. at turn on or off), the following specifications are not applied.

	No.	ITEM				Max. acceptable number A-zone	Unit	Note
Operating inspection	1	Dot defect	Sparkle mode	Green	4	pcs	1),2),4)	
				1-dot	7	pcs	1),2),4)	
				2-dots	3	Units	1),2),5)	
				3-dots	0			
				4-dots	0			
				Density	3	pcs/ ϕ 20 _{mm}	1),2),6)	
				Total	7	pcs	1),2)	
			Black mode	1-dot	7	pcs	1),3),4)	
				2-dots	3	Units	1),3),5)	
				3-dots	1			
				4-dots	0			
				Density	3	pcs/ ϕ 20 _{mm}	1),3),6)	
				Total	7	pcs	1),3)	
			Total	13	pcs	1)		
	2	Line defect				Serious one is not allowed.	—	—
	3	Uneven brightness					—	—
	4	Stain inclusion Line shape W : width (mm) L : length (mm)	W ≤ 0.02	L : Ignore	Ignore	pcs	7)	
			W ≤ 0.04	L ≤ 2.0	5			
				L > 2.0	0			
			W ≤ 0.08	L ≤ 1.0	5			
				L > 1.0	0			
			W > 0.08	—	(See dot shape)			
	5	Stain inclusion Dot shape D : ave. dia. (mm)	D ≤ 0.22		Ignore	pcs	7)	
			D ≤ 0.4		5			
			D > 0.4		0			
	6	Scratch on polarizer Line shape W : width (mm) L : length (mm)	W ≤ 0.02	L : Ignore	Ignore	pcs	8)	
			W ≤ 0.08	L ≤ 20	10			
L > 20				0				
W > 0.08			—	0				
7	Scratch on polarizer Dot shape D : ave. dia. (mm)	D ≤ 0.2		Ignore	pcs	8)		
		D ≤ 0.6		8				
		D > 0.6		0				

	No.	ITEM		Max. acceptable number A-zone	Unit	Note
operating inspection	8	Bubbles, peeling in polarizer [D : ave. dia. (mm)]	$D \leq 0.2$	Ignore	pcs	8)
			$D \leq 0.5$	5		
			$D > 0.5$	0		
non-operating inspection	9	Wrinkles on polarizer		Serious one is not allowed.	-	-

Note 1) Dot defect : defect area > 1/2 dot

2) Sparkle mode : brightness of dot is more than 30% at black. (visible to eye)

3) Black mode : brightness of dot is less than 70% at white. (visible to eye)

4) 1 dot : defect dot is isolated, not attached to other defect dot.

5) N dots : N defect dots are consecutive. (N means the number of defects dots)

6) Density : number of defect dots inside 20mm ϕ .

7) Those stains which can be wiped out easily are acceptable.

8) Polarizer area inside of B-zone is not applied.

9) No major (serious) defects when viewed in gray scale mode.

10. PRECAUTION

Please pay attention to the followings when a Super-TFT module with a back-light unit is used, handled and mounted.

10.1 Precaution to handling and mounting

- (1) Applying strong force to a part of the module may cause partial deformation of frame or mold, and cause damage to the display.
- (2) The module should gently and firmly be held by both hands. Never hold by just one hand in order to avoid any internal damage. Never drop or hit the module.
- (3) The module should be installed with mounting holes at each corner of a module.
- (4) Uneven force such as twisted stress should not be applied to a module when a module is mounted on the cover case. The cover case must have sufficient strength so that external force can not be transmitted directly to a module.
- (5) It is recommended to leave a space between a module and a holding board of a module so that partial force is not applied to a module.

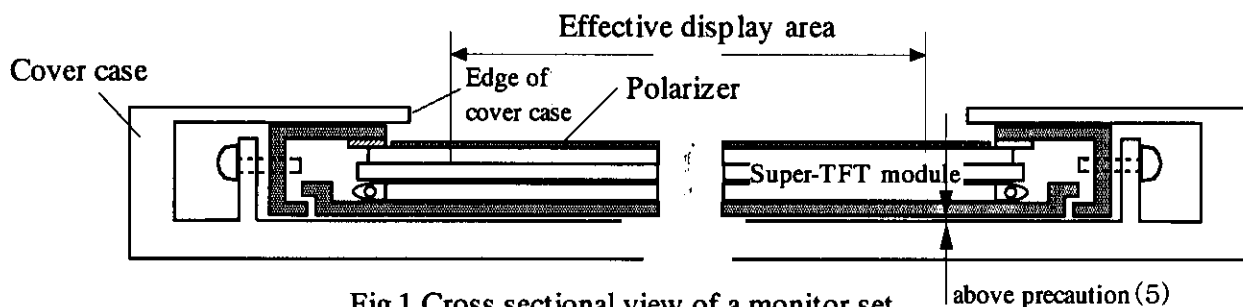


Fig.1 Cross sectional view of a monitor set

- (6) The edge of a cover case should be located inside more than 1mm from the edge of a module front frame.
- (7) A transparent protective plate should be added on the display area of a module in order to protect a polarizer and Super-TFT cell. The transparent protective plate should have sufficient strength so that the plate can not touch a module by external force.
- (8) Materials included acetic acid and choline should not be used for a cover case as well as other parts and boards near a module. Acetic acid attacks a polarizer. Choline attacks electric circuits due to electro-chemical reaction.
- (9) The polarizer on a TFT cell should carefully be handled due to its softness, and should not be touched, pushed or rubbed with glass, tweezers or anything harder than HB pencil lead. The surface of a polarizer should not be touched and rubbed with bare hand, greasy clothes or dusty clothes.
- (10) The surface of a polarizer should be gently wiped with absorbent cotton, chamois or other soft materials slightly contained petroleum benzene when the surface becomes dirty. Normal-hexane as cleaning chemicals is recommended in order to clean adhesives which fix front/rear polarizers on a Super-TFT cell. Other cleaning chemicals such as acetone, toluen and alcohol should not be used to clean adhesives because they cause chemical damage to a polarizer.
- (11) Saliva or water drops should be immediately wiped off. Otherwise, the portion of a polarizer may be deformed and its color may be faded.
- (12) The module should not be opened or modified. It may cause not to operate properly.

Displays, Hitachi, Ltd.	Date	Sep.06,2002	Sheet No.	3284STD - 0936 - 1	Page	13-1/3
-------------------------	------	-------------	-----------	--------------------	------	--------

(13) Metallic bezel of a module should not be handled with bare hand or dirty gloves. Otherwise, color of a metallic frame may become dirty during its storage. It is recommended to use clean soft gloves and clean finger stalls when a module is handled at incoming inspection process and production (assembly) process.

(14) Lamp(CCFL) cables should not be pulled and held.

10.2 Precaution to operation

- (1) The ambient temperature near the operated module should be satisfied with the absolute maximum ratings. Unless it meets the specifications, sufficient cooling system should be adopted to system.
- (2) The spike noise causes the mis-operation of a module. The level of spike noise should be as follows:
 $-200\text{mV} \leq \text{over- and under- shoot of VDD} \leq +200\text{mV}$
VDD including over- and under- shoot should be satisfied with the absolute maximum ratings.
- (3) Optical response time, luminance and chromaticity depend on the temperature of a Super-TFT module. Response time and saturation time of CCFL luminance become longer at lower temperature operation.
- (4) Sudden temperature change may cause dew on and/or in the a module. Dew males damage to a polarizer and/or electrical contacting portion. Dew causes fading of displayed quality.
- (5) Fixed patterns displayed on a module for a long time may cause after-image. It will be recovered soon.
- (6) A module has high frequency circuits. Sufficient suppression to electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be effective to minimize the interference.
- (7) Noise may be heard when a back-light is operated. If necessary, sufficient suppression should be done by system manufacturers.
- (8) The module should not be connected or removed while a main system works.

10.3 Electrostatic discharge control

- (1) Since a module consists of a Super-TFT cell and electronic circuits with CMOS-ICs, which are very weak to electrostatic discharge, persons who are handling a module should be grounded through adequate methods such as a list band. I/F connector pins should not be touched directly with bare hands.
- (2) Protection film for a polarizer on a module should be slowly peeled off so that the electrostatic charge can be minimized.

10.4 Precaution to strong light exposure

- (1) A module should not be exposed under strong light. Otherwise, characteristics of a polarizer and color filter in a module may be degraded.

10.5 Precaution to storage

When modules for replacement are stored for a long time, following precautions should be taken care of:

- (1) Modules should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during storage. Modules should be stored at 5 to 35°C at normal humidity (60%RH or less).
- (2) The surface of polarizers should not come in contact with any other object. It is recommended that modules should be stored in the Hitachi's shipping box.

Displays, Hitachi, Ltd.	Date	Sep.06,2002	Sheet No.	3284STD - 0936 - 1	Page	13-2/3
-------------------------	------	-------------	-----------	--------------------	------	--------

10.6 Precaution to handling protection film

- (1) The protection film for polarizers should be peeled off slowly and carefully by persons who are electrically grounded with adequate methods such as a list band. Besides, ionized air should be blown over during peeling action. Dusts on a polarizer should be blown off by an ionized nitrogen gun and so on.
- (2) The protection film should be peeling off without rubbing it to the polarizer. Because, if the film is rubbed together with the polarizer, since the film is attached to the polarizer with a small amount of adhesive, the adhesive may remain on a polarizer.
- (3) The module with protection film should be stored on the conditions explained in 10.5 (1). However, in case that the storage time is too long adhesive may remain on a polarizer even after a protection film is peeled off. Besides, in case that a module is stored at higher temperature and/or higher humidity, adhesive may remain on a polarizer. The remained adhesive may cause non-uniformity of display image.
- (4) The adhesive can be removed easily with Normal-Hexane. The remained adhesive or its vestige on the polarizer should be wiped off with absorbent cotton or other soft materials such as chamois slightly contained Normal-Hexane.

10.7 Safety

- (1) Since a Super-TFT cell and lamps are made of glass, handling to the broken module should be taken care sufficiently in order not to be injured. Hands touched liquid crystal from a broken cell should be washed sufficiently.
- (2) A inverter located in rear side of a module can drive by high voltage. Super-TFT module has a plastic cover due to safety of high voltage.
- (3) The module should not be taken apart during operation so that back-light drives by high voltage.

10.8 Environmental protection

- (1) The Super-TFT module contains cold cathode fluorescent lamps. Please follow local ordinance or regulations for its disposal.
- (2) Flexible circuits board and printed circuits board used in a module contain small amount of lead. Please follow local ordinance or regulations for its disposal.

10.9 Use restrictions and limitations

- (1) This product is not authorized for use in life support devices or systems, military applications or other applications which pose a significant risk of personal injury.
- (2) In no event shall Hitachi, Ltd., be liable for any incidental, indirect or consequential damages in connection with the installation or use of this product, even if informed of the possibility thereof in advance. These limitations apply to all causes of action in the aggregate, including without limitation breach of contract, breach of warranty, negligence, strict liability, misrepresentation and other torts.

10.10 Others

- (1) Electrical components which may not affect electrical performance are subjective to change without notice because of their availability.

Displays, Hitachi, Ltd.	Date	Sep.06,2002	Sheet No.	3284STD - 0936 - 1	Page	13-3/3
-------------------------	------	-------------	-----------	--------------------	------	--------